LUSSO INTELLISMART

Back-to-wall Rimless Toilet Bidet inc. Cistern and Chrome Flush Plate



LUSSO

TECHNOLOGY YOU CAN TRUST

FEATURES

- 1. Slim and smart design with the seat cover height of only 50mm.
- 2. Work with customised ceramic and available with wall-hung and back-to-wall toilets.
- 3. Adjustable water/air temperature and water flow.
- 4. SUS304 washing pipe with antibacterial nozzle, self-cleaning.
- 5. Adjustable position of the washing nozzle with pulsating and oscillating massage.
- 6. Air deodorisation.
 - LED nightlight design

Soft close seat cover with quick release function.

- 1. With rimless toilet.
- 2. With water heating mode of storage tank and performance of air gap and back flow prevention to confom to EN1717 standard.
- 3. CE certification.







1. CLEAN

Happy hygiene

2. CARE

Instant wellness

3. COMFORT

Luxury-my-way

1. CLEAN

Self-cleaning glazed toilet

Different from normal glaze toilet, self-cleaning glazed toilet is easier for cleaning, and not easy to stick dirt.

Rimless toilet

From now on, there is no place for dirt ans germs to hide, making a more attractive, more hygenic toilet.

Vortex flushing system

Only 3 seconds to instant cleaning through two-way 180° flush, vortex flushing system delivers a powerful action every time it is triggered.





Easy clean ceramics



Antibacterial seat



Vortex flushing system



Accessible nozzle for manual cleaning



Automatic self-cleaning nozzle



Antibacterial nozzle

2. CARE



Rear wash



Adjustable nozzle



Lady wash



Oscillating spray



Adjustable water temperature



Oscillating and pulsating shower



Adjustable water flow rate



Pulsating shower

3. COMFORT



User presets



Deodorisation



Air drying



Soft closing seat and cover




Night light

QUICK RELEASE DESIGN FOR SEAT AND COVER




The toilet lid and cover can easily be removed, cleaned and remounted.








OVERVIEW

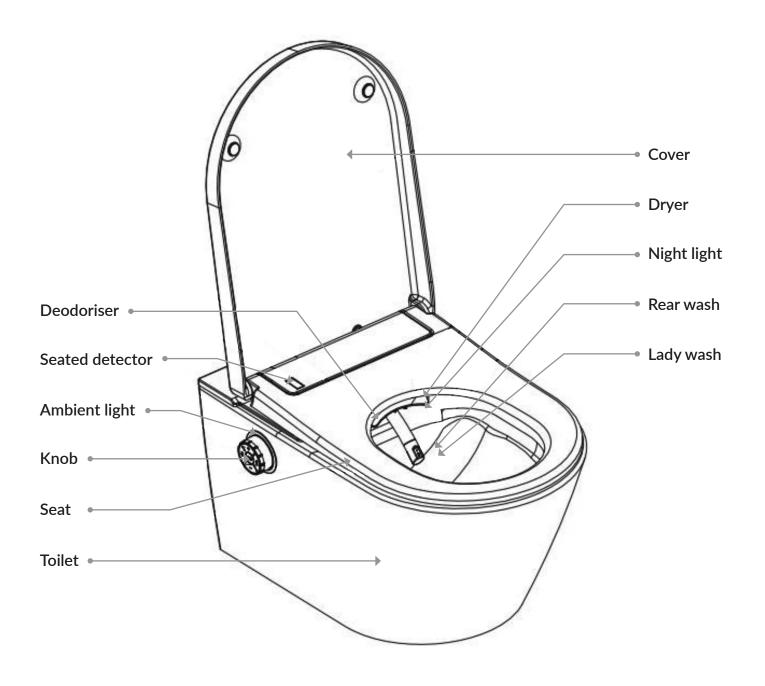

DIMENSIONS - BACK TO WALL BIDET

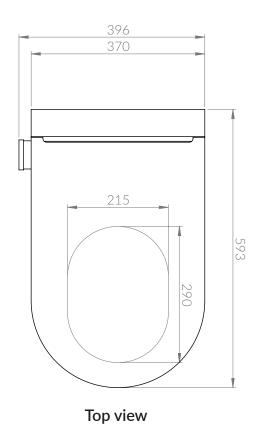






833


Side view with closed lid


Side view with open lid

DIMENSIONS - CISTERN

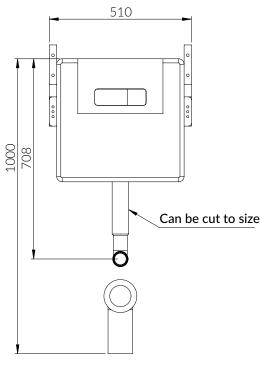




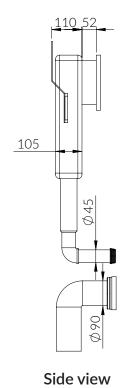


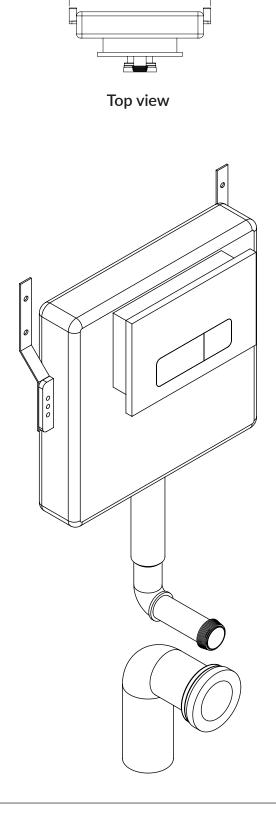

510

DIMENSIONS - FLUSH PLATE

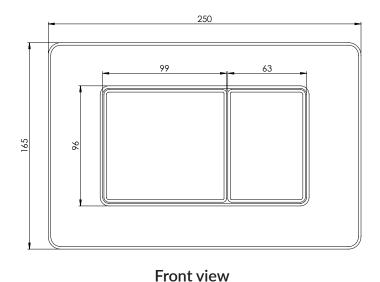



TECHNICAL SPECIFICATION

Water supply connector	G 3/8
Adaptable rated voltage	AC220-240, 50/60HZ
Electric power	950W
Power cord length	1.8m
Applicable water supply pressure range	0.07~0.75MPa(0.7~7.5Bar)
Applicable water supply temperature	4~35°C
Ambient temperature	4~40°C
Waterproof rate	IPX4
Water flow rate	350~650mL/min
Water temperature	31~39°C
Washing cycle	3 minutes
Water heating mode	Storage Tank
Maximum heater power	1200W
Safety device of the washing	Thermal cutoff fuses/ Liquid level switch/Thermostat
Back flow Prevention	Air Gap
Maximum air speed	5m/s
Maximum dryer power	280W
Drying cycle	3 minutes
Warm air temperature	35~50°C
Safety device of the drying	Thermal cutoff fuses/Thermostat
Deodorant method	Diatom pure
Deodorization cycle	15 minutes
Other safety device	Residual Current Devices

FUNCTION LIST

Rear Wash	•
Lady Wash	•
Oscillating Massage	•
Pulsating Massage	•
Oscillating and Pulsating Spray	•
Adjustable Water Temperature (5 steps)	•
Adjustable Water Flow Rate (5 steps)	•
Adjustable Spray Position (5 steps)	•
Air Drying	•
Adjustable Dryer Temperature (5 steps)	•
Deodoriser	•
Nozzle Self-Cleaning	•
Nozzle Manual-Cleaning	•
User Mode (2 users)	•
Night Light	•
Ambient Light	•
Self Closing Seat and Cover	•
Quick Release Seat and Cover	•
Body Knob	•
Remote Control	•
Rimless Toilet	•

Lusso
Carbury House
Eagle Court
Preston Farm Industrial Estate
Stockton-on-Tees
TS18 3TB

Email: info@lussostone.com

Tel: 0203 370 4057 www.lussostone.com