

THE  
INTELLISMART

RIMLESS TOILET



LUSO



# THE INTELLISMART RIMLESS TOILET

The Intellismart toilet is renowned for its innovative technology, hygienic design and unrivalled level of comfort that allows you to elevate your everyday experience. Crafted with an array of benefits and features, the Intellismart toilet is designed to provide ultimate comfort. The wall hung and back to wall smart toilets include a remote control that enables you to manage a wide range of features. This includes adjusting the water temperature and flow rate, setting personal presets and air drying. Expertly crafted from smooth ceramic, the Intellismart toilet features a concealed cistern and slim profile that maximises space. The rimless design creates exceptional hygiene levels and less bacteria build-up which makes it easier to clean. The toilets come complete with a flush plate in one of our beautiful brassware finishes.


## LUSO





## FEATURES

1. Slim profile design for a modern appeal.
2. Adjustable air temperature and air deodorisation.
3. The intensity of the water flow and water temperature can be increased or decreased.
4. The adjustable nozzle comes with a pulsating and oscillating massage function that can be positioned to meet your preference.
5. Rear wash maximises cleansing efficiency.
6. LED night light provides a gentle glow and safe guidance.
7. Soft-close seat cover with quick-release function that is anti-bacterial.
8. Rimless technology for ultimate hygiene.
9. Personalised presets can be memorised.
10. Odour extraction automatically removes unpleasant scents.

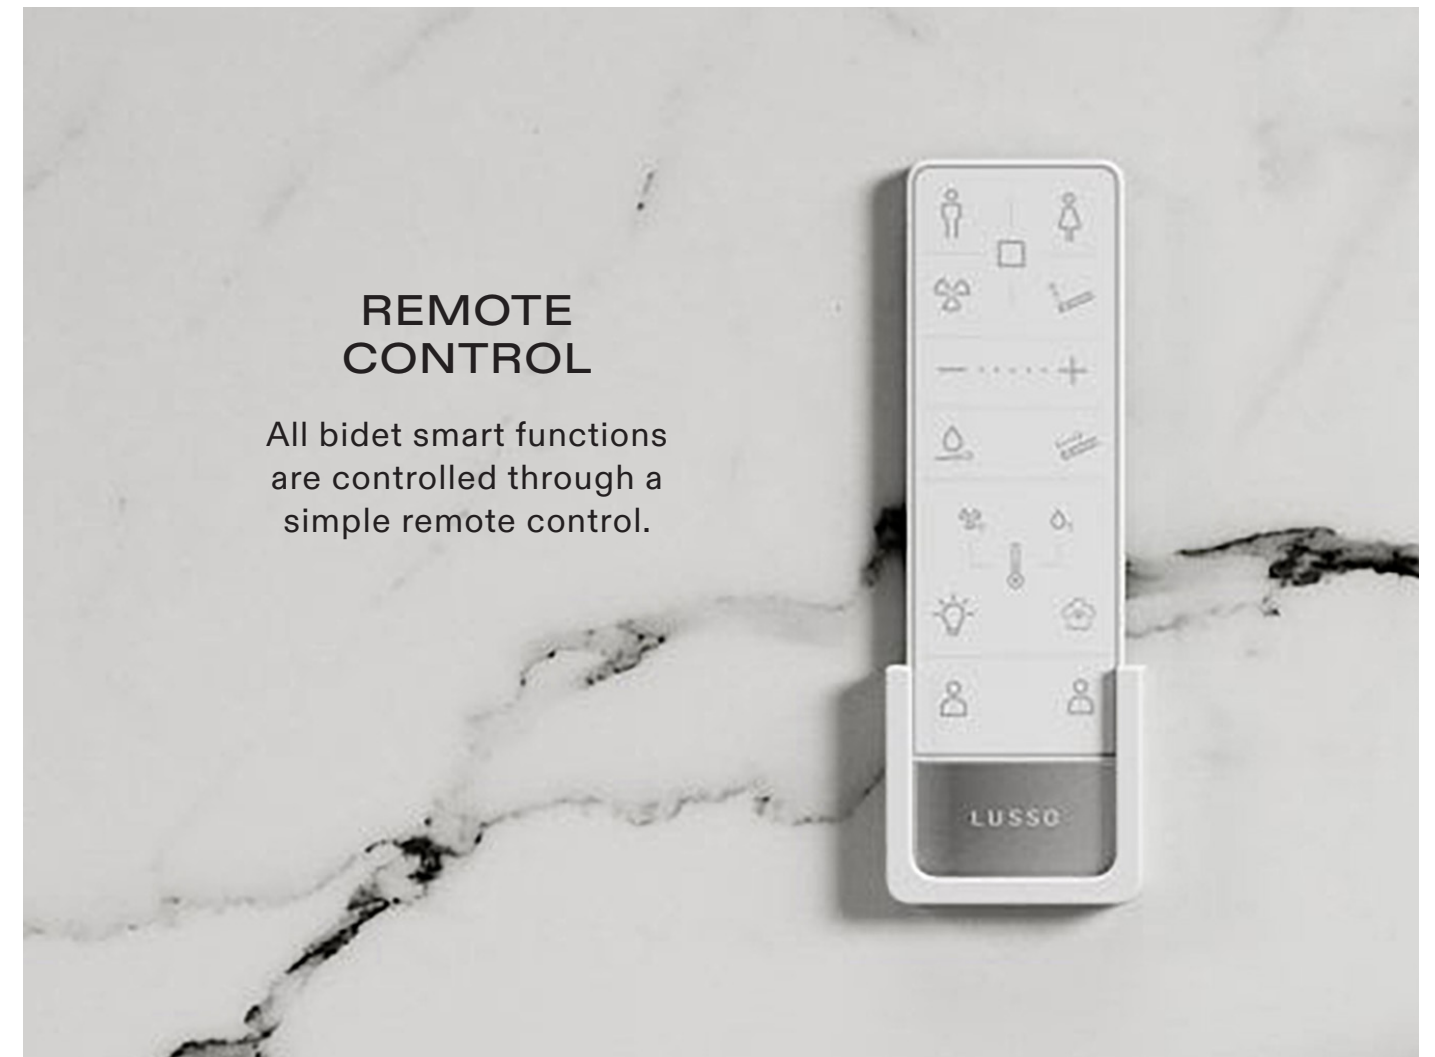

## REMOTE CONTROL

All bidet smart functions are controlled through a simple remote control.



## DIAL

Rotate and press the dial to adjust and control functions.



## 1. CLEAN

### RIMLESS TOILET

A rimless toilet offers improved cleanliness, high water efficiency and easy maintenance.

### HYGIENE


The rimless system avoids bacteria build-up and residue offering maximum hygiene.

### CLEAN FLUSH

Water flows around the basin during flushing and uses a rear-mounted valve which pushes water into the bowl horizontally and around the edges. This means there are no hidden crevices for waste to enter and gather.




Easy clean  
ceramics



Accessible nozzle  
for manual cleaning




Antibacterial  
seat



Automatic self-  
cleaning nozzle



Vortex flushing  
system



Antibacterial  
nozzle


2. CARE




Rear wash




Lady wash




Adjustable  
nozzle



Oscillating  
spray



Adjustable water  
temperature



Oscillating and  
pulsating shower




Adjustable  
water flow rate



Pulsating  
shower

3. COMFORT




User presets



Deodorisation




Air drying



Soft-closing and  
quick-release seat



Night light




Remote  
Control

QUICK RELEASE DESIGN  
FOR SEAT AND COVER







OVERVIEW

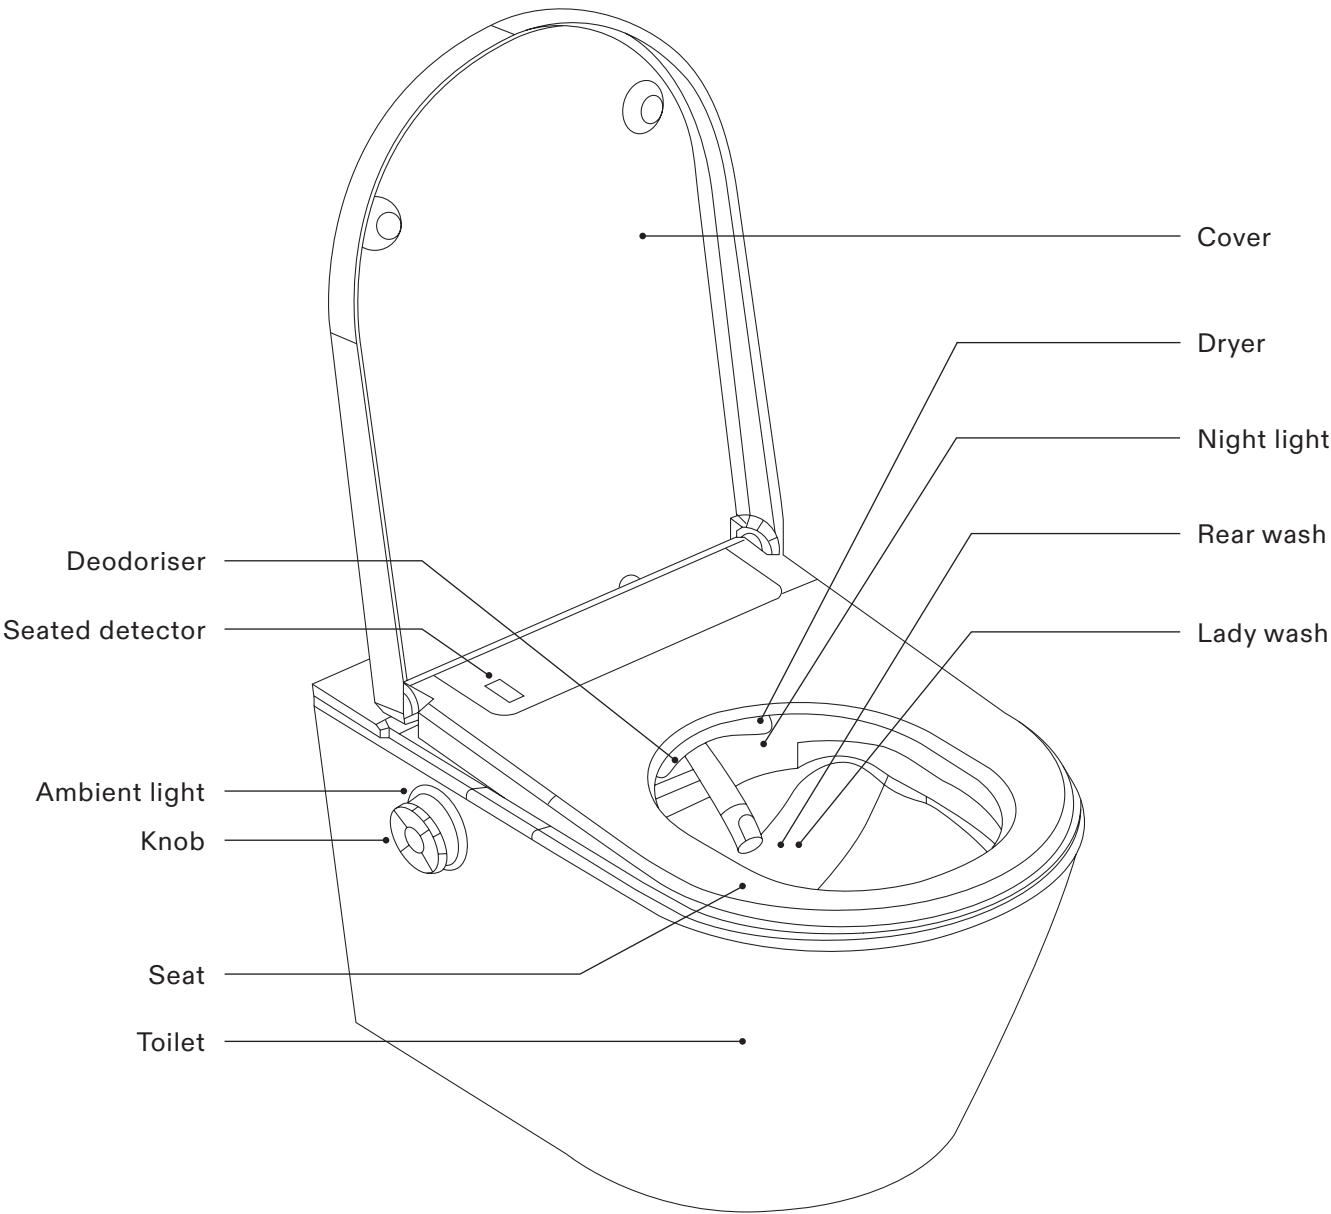


## DIMENSIONS - WALL HUNG BIDET

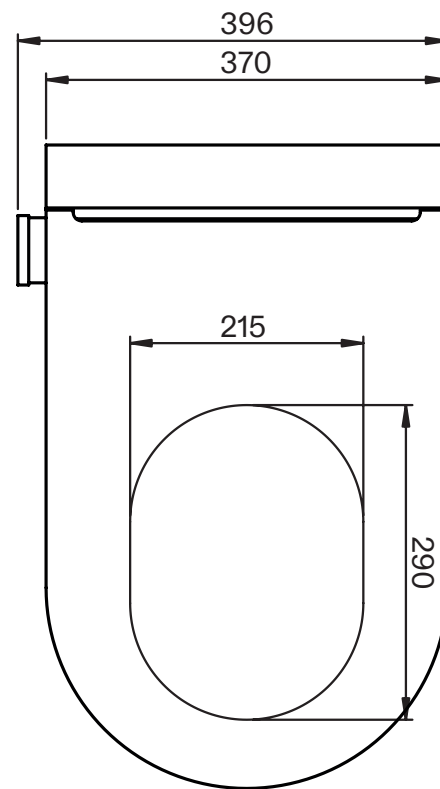


Top view

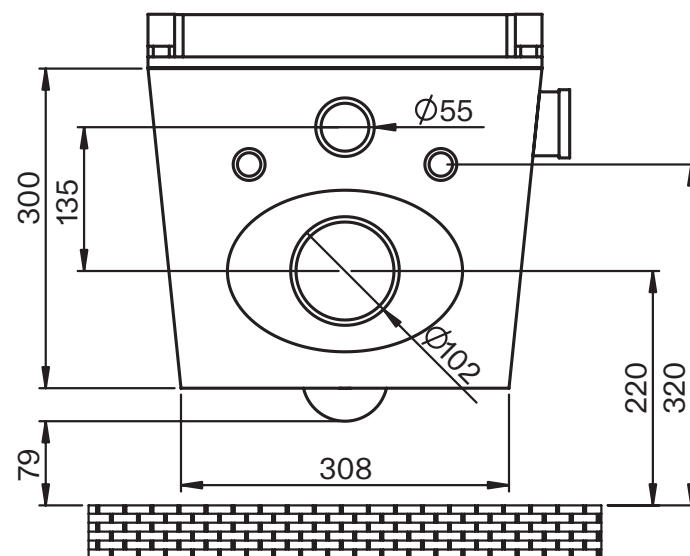

Back view

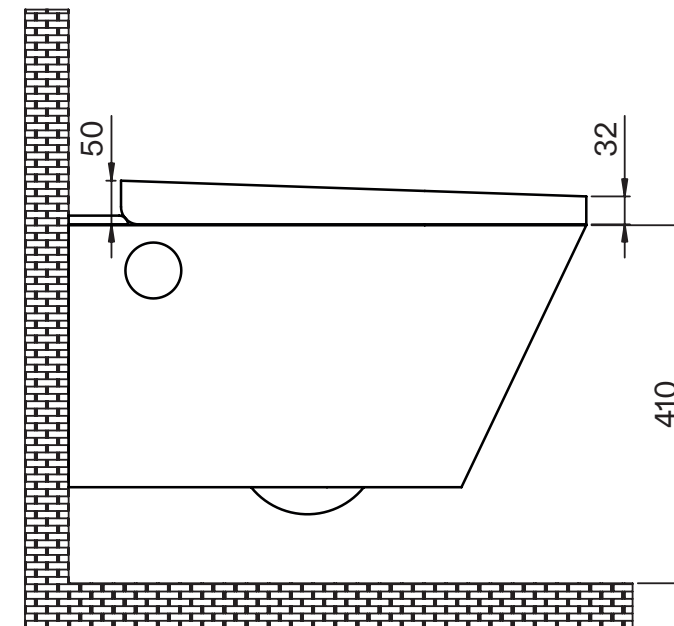


Side view

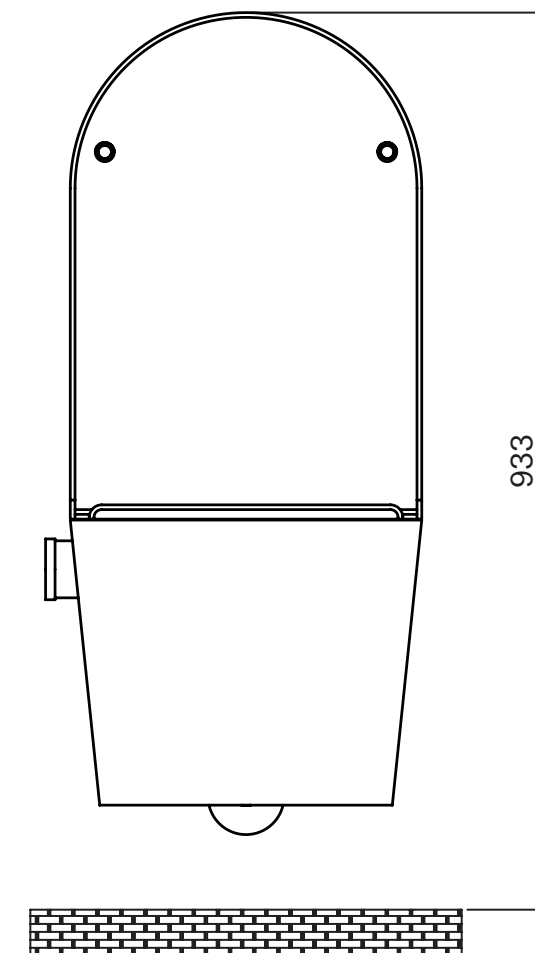


Front view (lid open)


## DIMENSIONS - CISTERN (WALL HUNG)

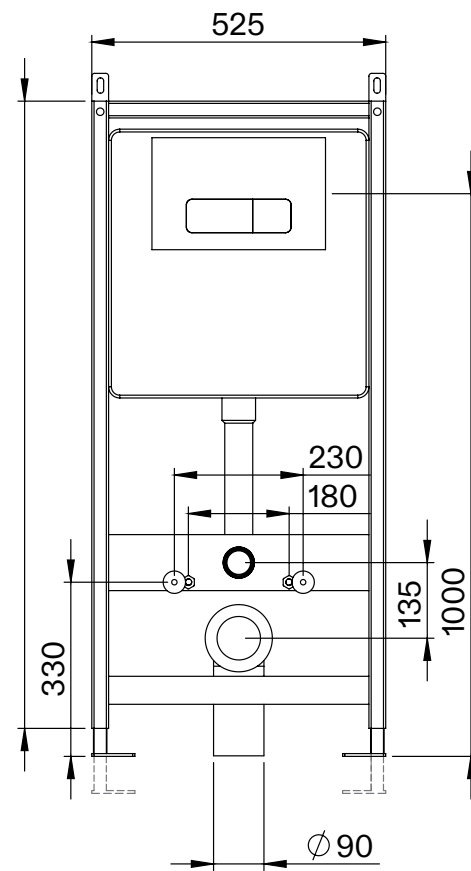


Front view

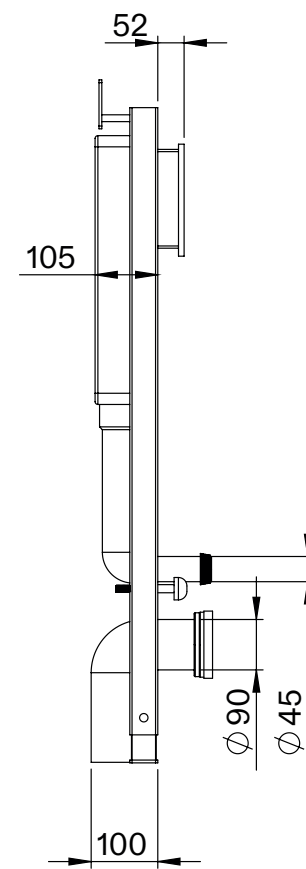

Side view

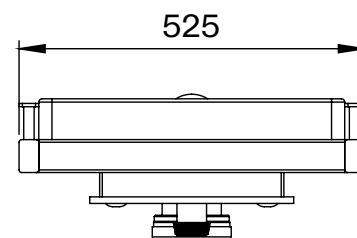


Top view

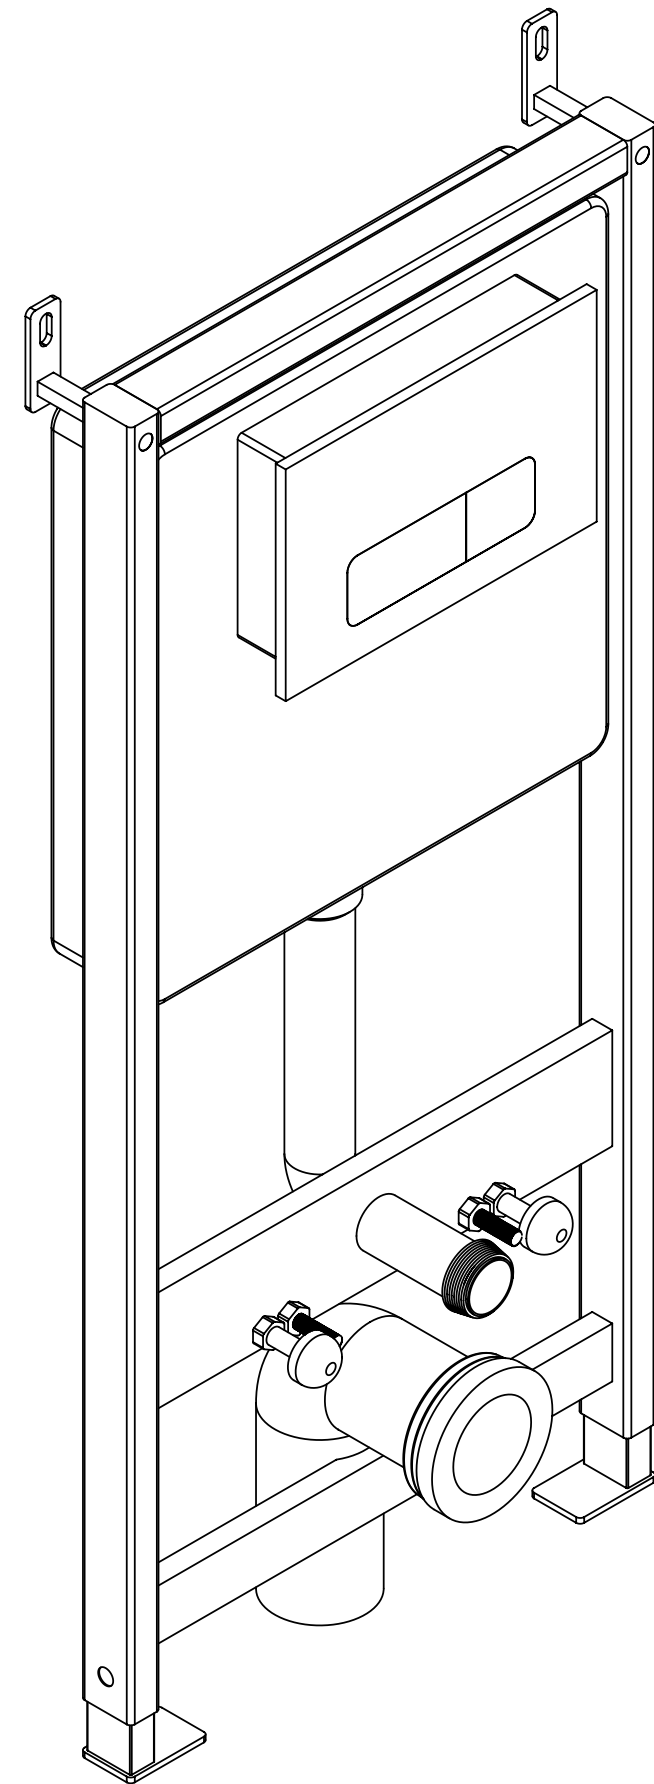





## DIMENSIONS - BACK TO WALL BIDET

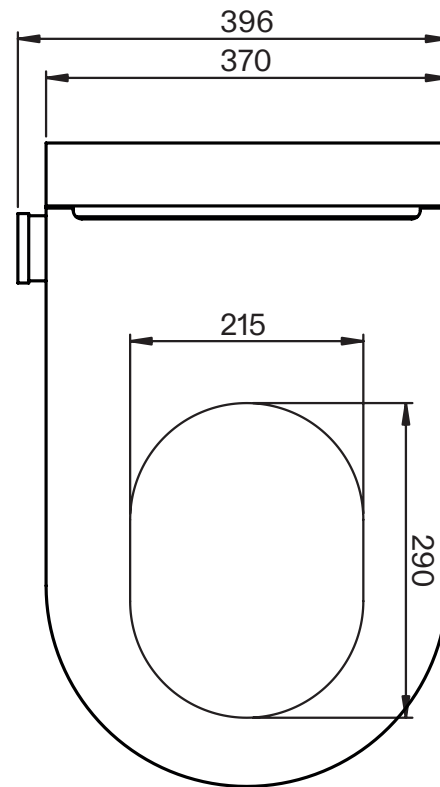


Top view

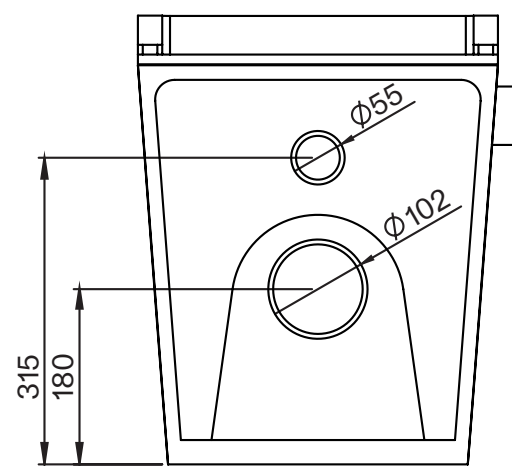

Back view

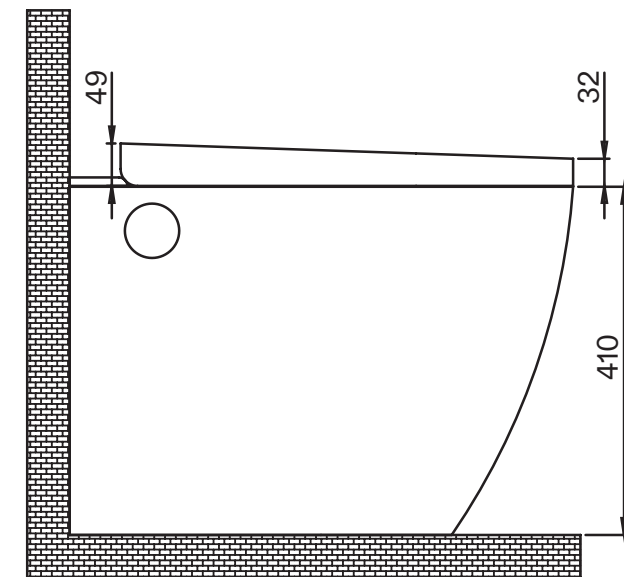


Side view

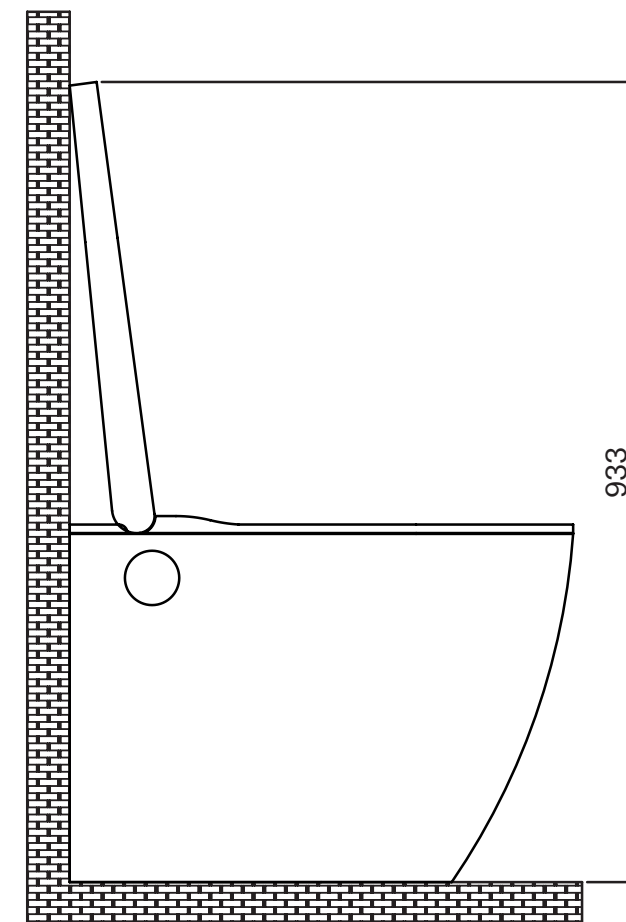


Side view (lid open)


## DIMENSIONS - CISTERN (BACK TO WALL)

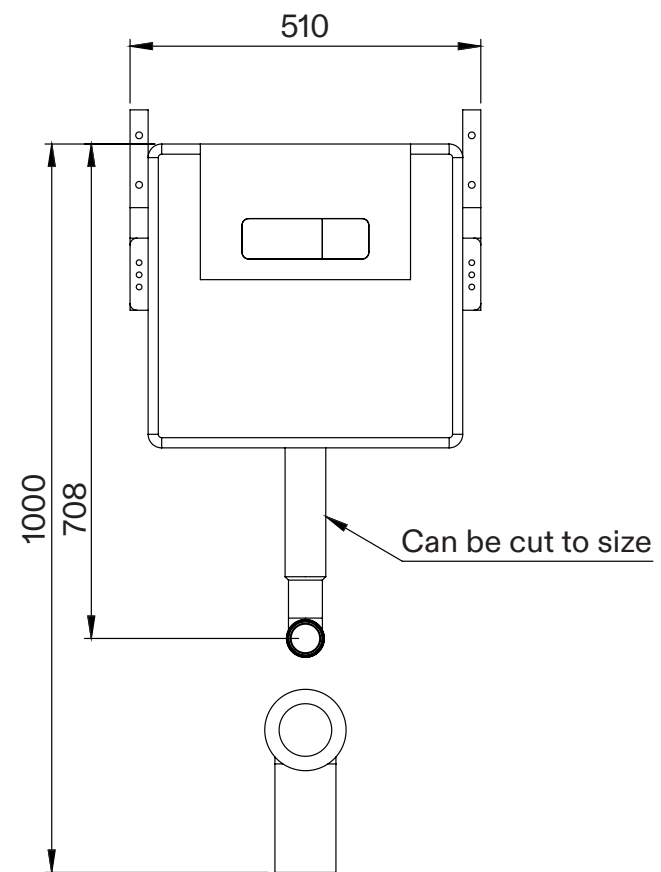


Front view

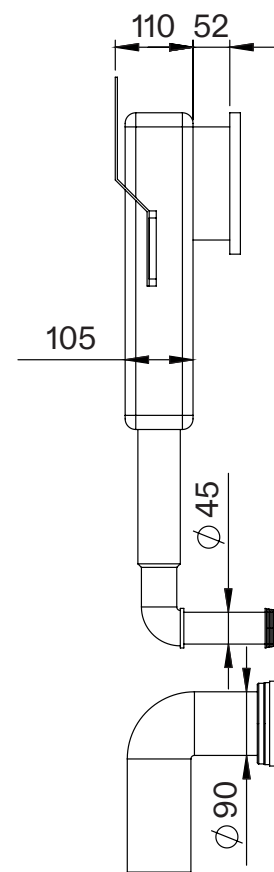


Side view

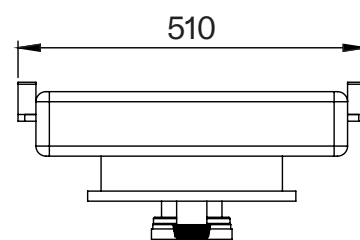


Top view

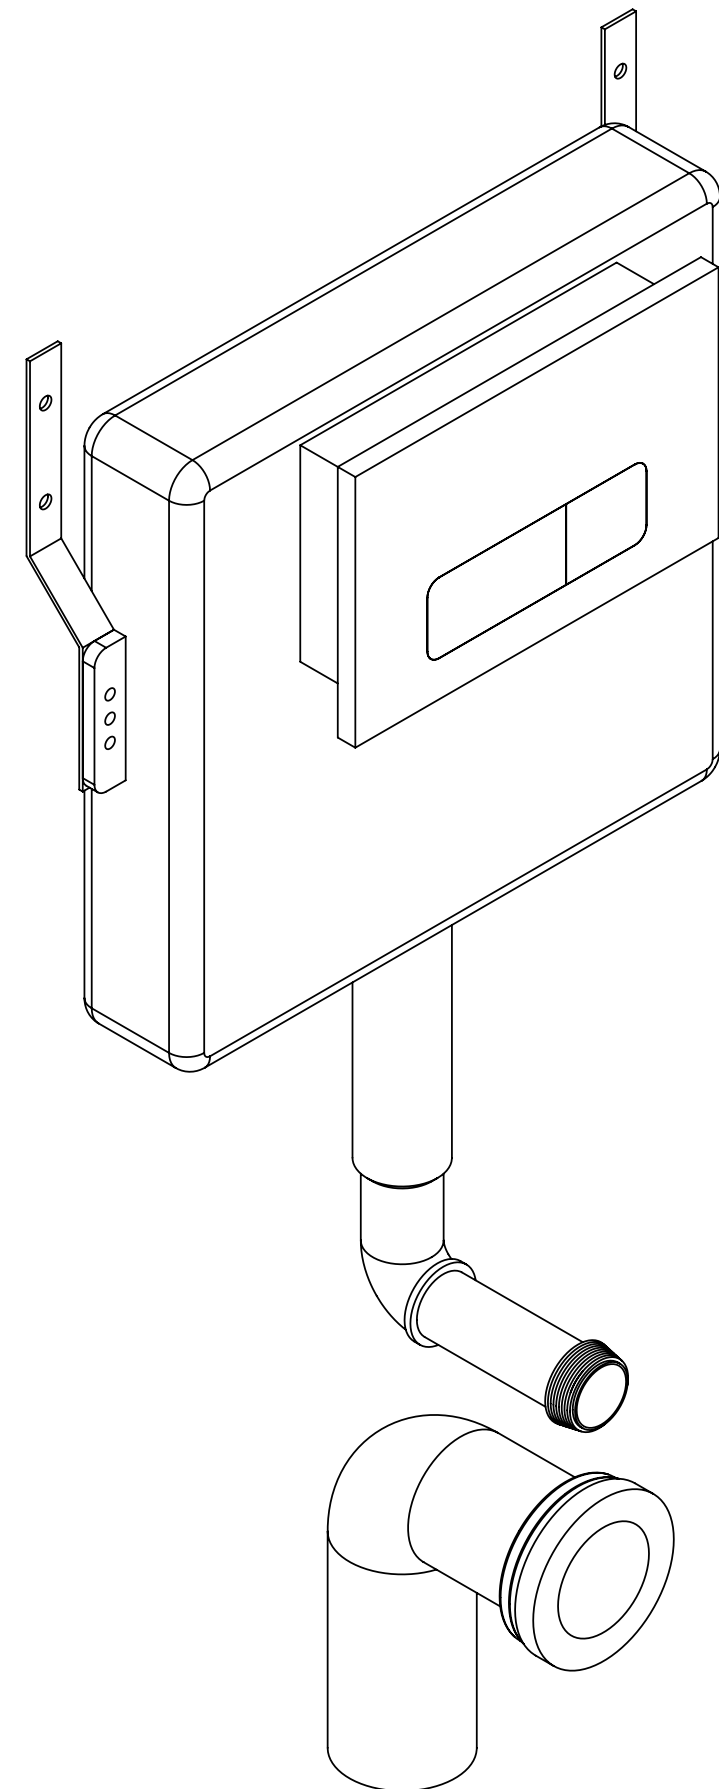

**DIMENSIONS  
- FLUSH PLATE**

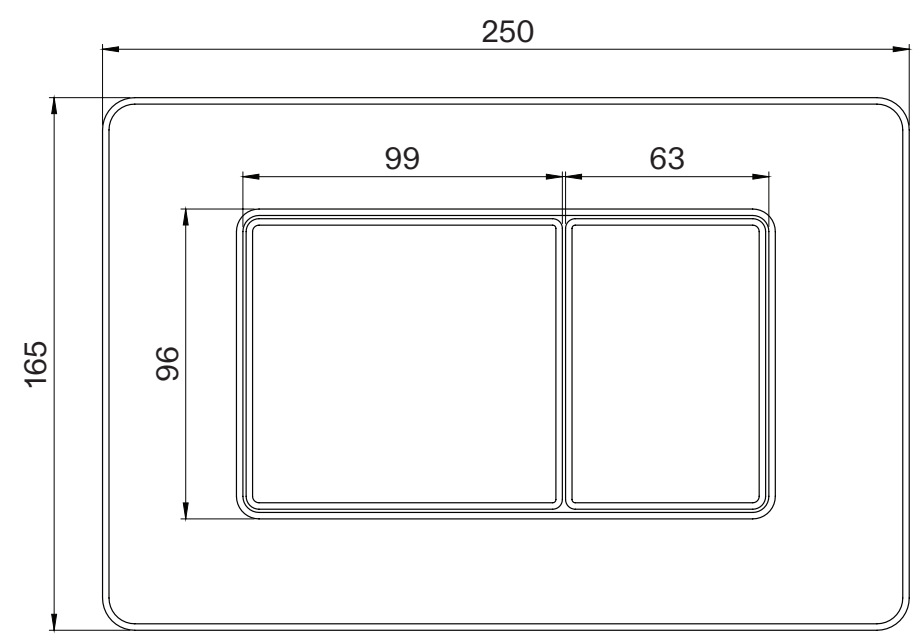

Font view



Side view





# TECHNICAL SPECIFICATION

Water supply connector	G 3/8
Adaptable rated voltage	AC220-240, 50/60HZ
Electric power	950W
Power cord length	1.8m
Applicable water supply pressure range	0.07~0.75MPa(0.7~7.5Bar)
Applicable water supply temperature	4~35°C
Ambient temperature	4~40°C
Waterproof rate	IPX4
Water flow rate	350~650mL/min
Water temperature	31~39°C
Washing cycle	3 minutes
Water heating mode	Storage Tank
Maximum heater power	1200W
Safety device of the washing	Thermal cutoff fuses/ Liquid level switch/Thermostat
Back flow Prevention	Air Gap
Maximum air speed	5m/s
Maximum dryer power	280W
Drying cycle	3 minutes
Warm air temperature	35~50°C
Safety device of the drying	Thermal cutoff fuses/Thermostat
Deodorant method	Diatom pure
Deodorization cycle	15 minutes
Other safety device	Residual Current Devices

# FUNCTION LIST

Rear Wash	✓
Lady Wash	✓
Oscillating Massage	✓
Pulsating Massage	✓
Oscillating and Pulsating Spray	✓
Adjustable Water Temperature (5 steps)	✓
Adjustable Water Flow Rate (5 steps)	✓
Adjustable Spray Position (5 steps)	✓
Air Drying	✓
Adjustable Dryer Temperature (5 steps)	✓
Deodoriser	✓
Nozzle Self-Cleaning	✓
Nozzle Manual-Cleaning	✓
User Mode (2 users)	✓
Night Light	✓
Ambient Light	✓
Self Closing Seat and Cover	✓
Quick Release Seat and Cover	✓
Body Knob	✓
Remote Control	✓
Rimless Toilet	✓

TO VIEW THE ENTIRE COLLECTION  
GO TO [LUSSO.COM](https://www.lusso.com)



# LUSSO

[LUSSO.COM](https://www.lusso.com)  
[SALES@LUSSO.COM](mailto:SALES@LUSSO.COM) | 0203 370 4057